



We Build and Service the Whole Car

CF5650N


PRESSUREAIDE®



CF5650N

The *CF5650N Pressureaide® Covered Hopper Car* is specifically designed and engineered to handle a wide variety of dry bulk fluidizeable products, like flour, in a safe and efficient manner. Its clean bore design (no interior bulkheads) is well suited for flood load and pressure loading systems. The Pressureaide® car operates with internal pressures up to 14.5 psig, which allows for faster unloading. Safety is a priority with ARI; each car is equipped with two (2) pressure relief valves, a rupture disc and a vacuum relief valve.

General Arrangement

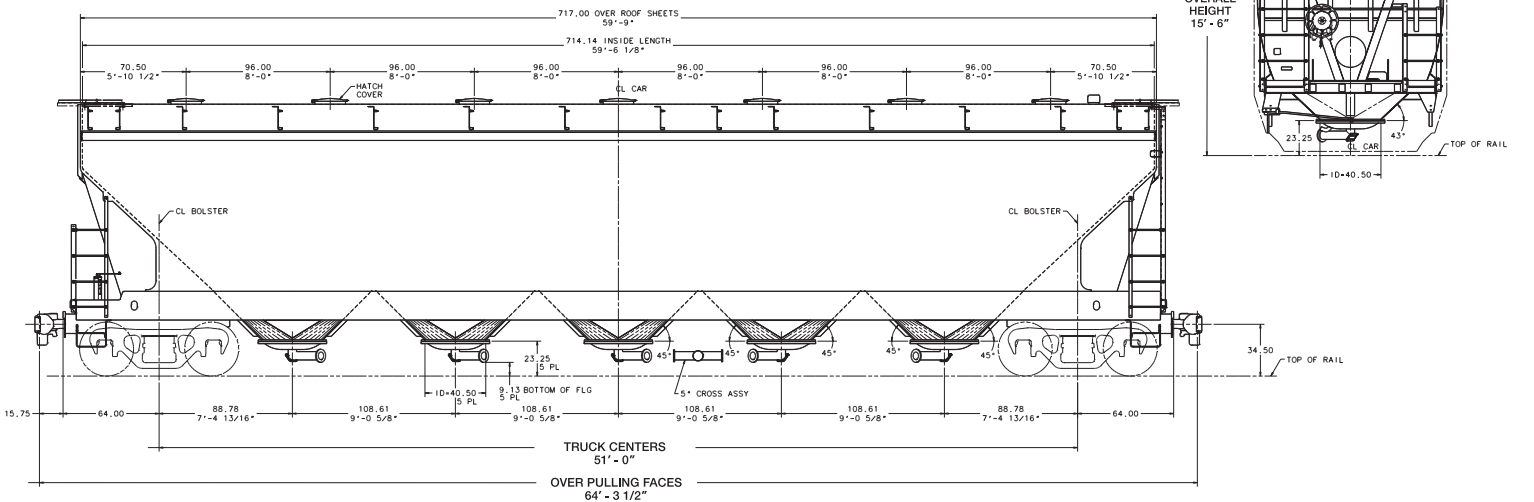

SPECIFICATIONS

| | |
|--|------------------|
| Length Over Pulling Face | 64' 3 1/2" |
| Truck Centers | 51' |
| Overall Height | 15' 6" |
| Width Over Side Sheets | 10' 4" |
| Height Rail to Bottom of Discharge Outlets | 9 1/8" |
| Number of Compartments | 1 with 5 hoppers |
| Number of Outlets Per Hopper | 1 |
| Size of Roof Hatches | 20" DIA. |
| Slope End Floor Sheet | 45° & 43° |
| Slope Interior Floor Sheet | 45° |
| Slope Side Slope Sheet | 43° |
| Cubic Capacity | 5650 cu. ft. |
| Estimated Nominal Lightweight | 66,900 lbs. |
| Horizontal Curve Negotiability - Uncoupled | 180 ft. |

NOTE: All ARI Pressureaide® covered hopper cars are built to 286,000 lb. GRL specifications. All dimensions are for nominal light car.



MANUFACTURING
AMERICAN RAILCAR INDUSTRIES, INC.

100 Clark Street, St. Charles, Missouri 63301

(636) 940-6020 • (636) 940-6100 FAX

e-mail: sales@americanrailcar.com / website: www.americanrailcar.com

WE BUILD AND SERVICE THE WHOLE CAR