



We Build and Service the Whole Car

T6600

THRU SILL




T6600


T6600 Thru Sill Covered Hopper Car

The 6600 cu. ft. Thru Sill covered hopper car is designed for distilled dry grain, providing both the shipper and receiver with the highest quality covered hopper car in the industry.

Since the introduction of the Thru Sill car, it has evolved to accommodate the wide range of products that exists today. Improvements to the car's shape, joint designs, outlet mounting frame, hatches and outlets provide optimum protection for today's dry bulk products and enhance the associated loading, unloading and cleaning processes. A variety of loading hatches and discharge outlets can be applied to the car to suit your specific needs.

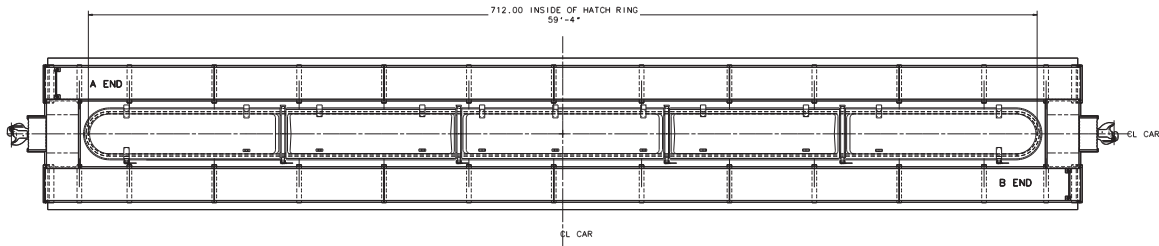

General Arrangement

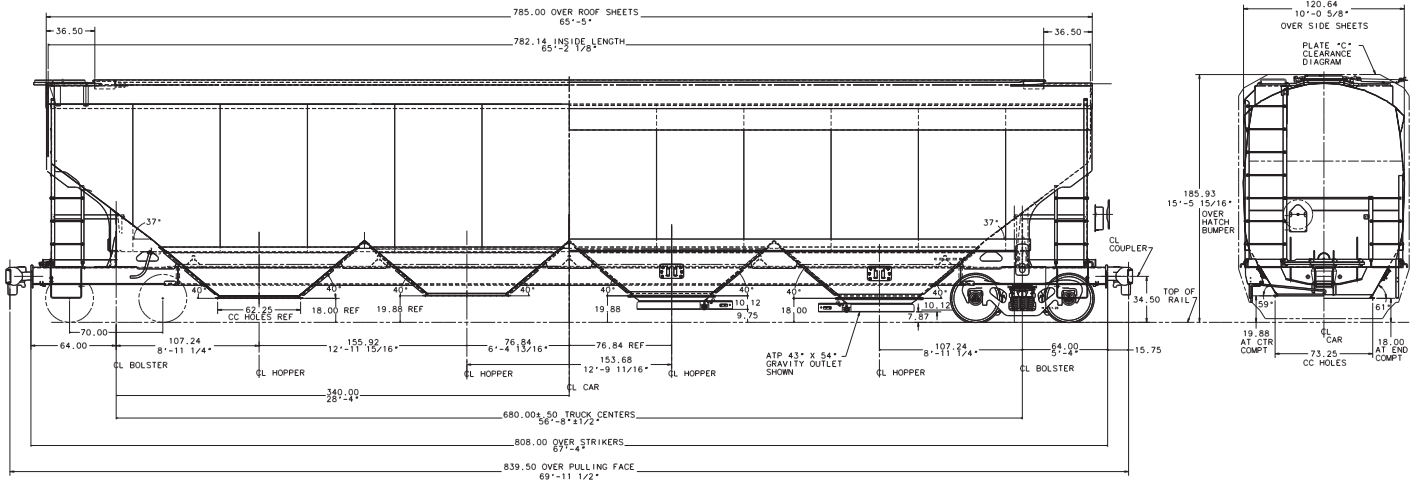

SPECIFICATIONS

Cubic Capacity	6600 ft ³
Center of Gravity from Rail	
Empty	64½"
Loaded	95½"
Horizontal Curve Negotiability, Uncoupled (Minimum Radius of Curvature)	180'
Vertical Curve Negotiability, Uncoupled, Empty	930'
Number of Discharge Openings	4
Length Over Strikers	67'4"
Length Over Coupler Pulling Face	69'11½"
Extreme Height	15'6"
Extreme Width	10'5½"
Estimated Light Weight	70,100 lbs.
Gross Rail Load	286,000 lbs.
Plate C Construction	YES

Available Loading Hatches

- Continuous Hatch 30" (1/car) - Fiberglass or Aluminum

Available Discharge Outlets for Standard 60-bolt Mounting Flange

- Gravity Outlets (4/car)
- Gravity-Pneumatic Outlets (4/car)

Standard Features

- Vibrator Brackets (2/hopper, 8/car)



MANUFACTURING
AMERICAN RAILCAR INDUSTRIES, INC.

100 Clark Street, St. Charles, Missouri 63301

(636) 940-6020 • (636) 940-6100 FAX

e-mail: sales@americanrailcar.com / website: www.americanrailcar.com